

**Stain Proof. Bleachable.
Cleanable. Worry Free.**

Tedlar™ Wallcoverings are protected by a film that provides an impervious barrier against stains. Tedlar™ Wallcoverings can stand up to industrial cleaning products including bleach without discoloration. So when accidents happen, your wallcoverings look good regardless.






The Iodine and Acetone Test



One drop of Iodine was placed on the surface of the wallcovering and left for an hour. It was then wiped away with a dry cloth. Afterwards the surface was wiped using nail polish remover.

The iodine on the standard wallcovering soaks into the surface and is unwashable unlike the Tedlar™ which beads on the surface and wipes away clean. The nail polish remover damages the surface of the standard wallcovering and still does not remove the iodine while the Tedlar™ wallcovering remains intact.


TEDLAR™ Wallcoverings

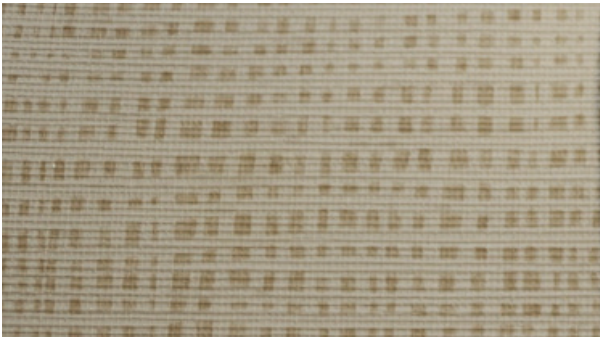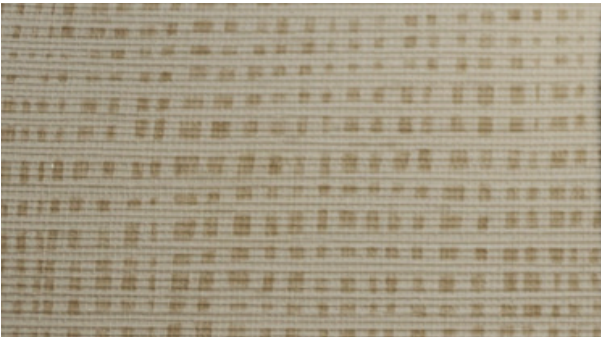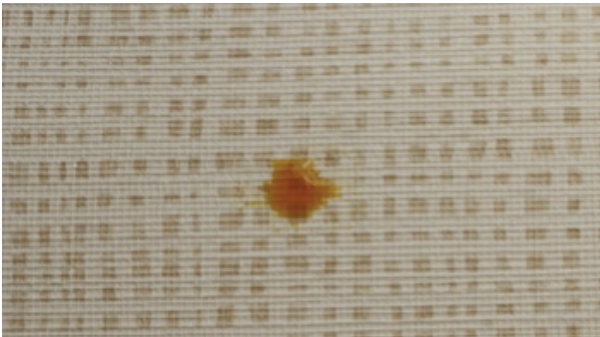

Standard Type II Wallcoverings

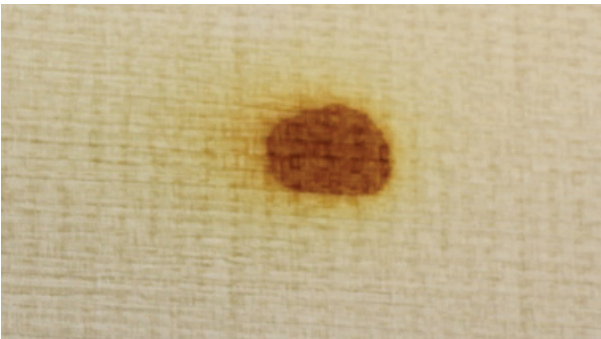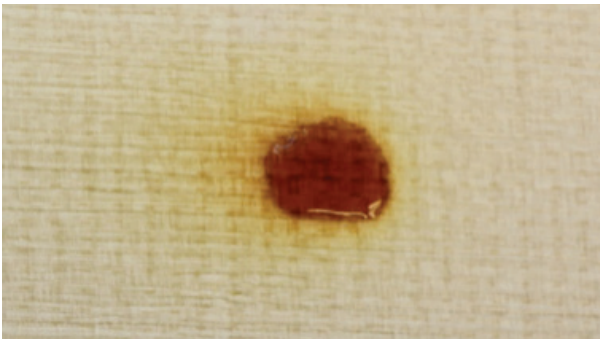

Safe for Important Environments



Mold, Mildew, and Bacteria

Bacteria does not degrade Tedlar™ film, nor does the film provide nutrients to assist bacterial growth. Tedlar™ Wallcoverings are certified by the MicroStar Labs, Chicago, IL, to pass ASTM G21 and JIS Z 2801.



Fire and Smoke

Tedlar™ film has low smoke ratings and does not readily burn or support combustion. Exceeding the ASTM E84 Class A rating, it is one of the safest materials designed for interiors.

Durable

Tedlar™ Wallcoverings offer exceptional scrubbability and abrasion resistance. Tedlar™ Wallcoverings offers Type III surface protection in a Type II weight.

Property	Section Reference	Category V Type II Commercial Serviceability	Tedlar™ Wallcoverings	Category VI Type III Commercial Serviceability
Minimum colorfastness	7.3	200h	Excellent	200 h
Minimum scrubbability	7.7	300 cycles	Passes 500 cycles	500 cycles
Minimum abrasion resistance (220 grit)	7.8	300 cycles	Passes 1000 cycles	1000 cycles
Minimum breaking strength: MD (machine direction)	7.9	50 lb [22.7 kg]	106 lb (Passes)	100 lb [45.4 kg]
Minimum breaking strength: CMD (cross machine direction)	7.9	55 lb [24.9 kg]	129 lb (Passes)	95 lb [43.1 kg]
Minimum tear resistance Elmendorf Tear Scale (MD/CMD)	7.10	25/25	76.2/≥100 (Passes)	50/50
Maximum blocking resistance	7.11	< 2	1 (Passes)	< 2

Tedlar™ Wallcoverings Staining Agents and Cleaning Methods

All products were applied to Tedlar™ Wallcoverings and allowed to set for 24 hours. Utilizing the following methods, all products were successfully removed from the Tedlar™ wallcoverings.

Dry Cloth Cleaning

- Acid Solutions*
- Acetone
- Butanone
- Ethylalcohol
- Gasoline
- Glycol
- Toluene

Wet Cloth Cleaning

- Coffee
- Grape Juice
- Mustard Sauce
- Red Wine
- Tea Stains
- Worcestershire Sauce
- Chocolate Syrup
- Brake Fluid
- Iodine
- Sodium Hydroxide

Detergent

- Ketchup
- Black Crayons
- Brown Shoe Polish
- Lipstick
- Whire Board Marker
- Oily Pen
- Asphalt
- Mercurochrome

Solvent

- Ball Point Pen
- Spray Paint

*Acid Solutions include: Acetic acid, 10% nitric acid, 20% hydrochloric acid, and 30% sulfuric acid

tedlarwallcoverings.dupont.com

DUPONT™ TEDLAR™ WALLCOVERINGS
Style that Endures™

